


# U字溝(上ぶた式U形側溝)



## ▼用途

- 1種=主として歩道に用いる側溝
- 2種=主として車道に平行して用いる側溝


## ■本体

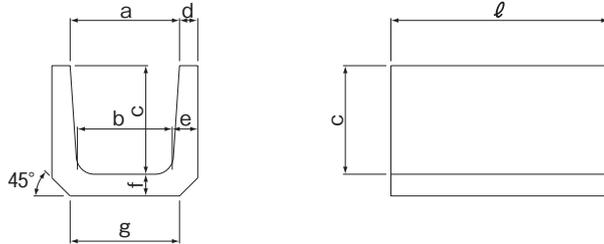

種類	呼称	参考質量 (kg)	寸法 (mm)								
			a	b	c	d	e	f	g	r	l
1種 および 2種	150	24	150	140	150	30	35	35	160	30	600
	180	33	180	170	180	35	40	40	190	50	600
	240	55	240	220	240	45	50	50	240	50	600
	300A	70	300	260	240	50	60	60	300	50	600
	300B	79	300	260	300	50	60	60	300	50	600
	300C	92	300	260	360	50	60	65	300	50	600
	360A	91	360	310	300	50	65	65	360	50	600
	360B	100	360	310	360	50	65	65	360	50	600
	450	133	450	400	450	55	70	70	430	70	600
600	216	600	540	600	70	80	80	600	70	600	

※1種と2種は、配筋が違います。

## ■蓋

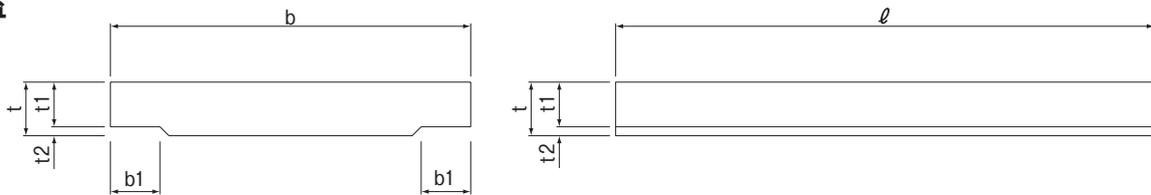

種類	呼称	参考質量 (kg)	寸法 (mm)					
			b	b 1	t	t 1	t 2	l
1種 (歩道用)	150	10	210	35	35	30	5	600
	180	14	250	40	40	35	5	600
	240	21	330	50	45	40	5	600
	300	33	400	55	60	50	10	600
	360	40	460	55	65	55	10	600
	450	54	560	60	70	60	10	600
	600	77	740	75	75	65	10	600
2種 (T-8)	150	26	210	35	90	80	10	600
	180	31	250	40	90	80	10	600
	240	45	330	50	100	85	15	600
	300	55	400	55	100	85	15	600
	360	64	460	55	100	85	15	600
	450	93	560	60	120	100	20	600
600	157	740	75	150	130	20	600	