

道路側溝




□道路側溝 B 型

▼用途

- 1種＝主として歩道に用いる側溝
- 3種＝主として車道に平行して用いる側溝

■本体

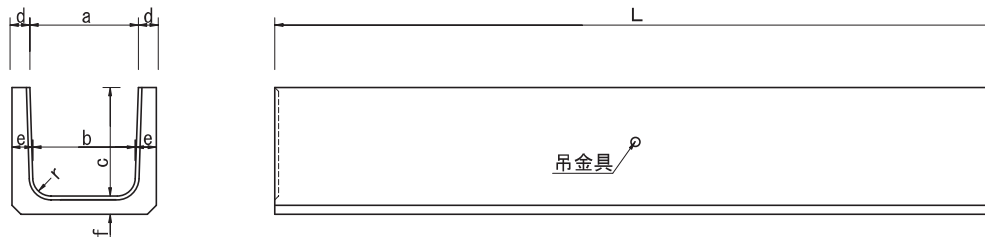

種類	呼び名	参考質量 (kg)		寸法 (mm)								
		495	1,995	a	b	c	d	e	f	r	l	
1種	250	49	200	250	230	250	45	55	50	50	495	1,995
	300A	62	251	300	280	300	50	60	50	50	495	1,995
	300B	79	321	300	270	400	50	65	55	50	495	1,995
	300C	98	396	300	260	500	50	70	60	50	495	1,995
	400A	86	347	400	370	400	50	65	55	50	495	1,995
	400B	105	425	400	360	500	50	70	60	50	495	1,995
	500A	112	453	500	460	500	50	70	60	50	495	1,995
	500B	133	537	500	450	600	50	75	65	50	495	1,995
3種	250	56	227	250	230	250	55	65	55	50	495	1,995
	300A	74	301	300	280	300	60	70	60	50	495	1,995
	300B	88	356	300	270	400	55	70	65	50	495	1,995
	300C	115	463	300	260	500	60	80	75	50	495	1,995
	400A	99	399	400	370	400	55	70	70	50	495	1,995
	400B	126	508	400	360	500	60	80	75	50	495	1,995
	500A	138	558	500	460	500	60	80	80	50	495	1,995
	500B	173	699	500	450	600	65	90	90	50	495	1,995

□改良型道路側溝

呼び名	参考質量 (kg)	寸法 (mm)								
		a	b	c	d	e	f	r	l	
250	235	250	230	250	55	65	65	50	2,000 又は 500	
300A	310	300	280	300	60	70	70	50		
400A	400	400	370	400	55	70	70	50		
500A	560	500	460	500	60	80	80	50		