


## □道路側溝 B 型

### ▼用途

- 1種=主として歩道に用いる側溝
- 3種=主として車道に平行して用いる側溝

### ■本体

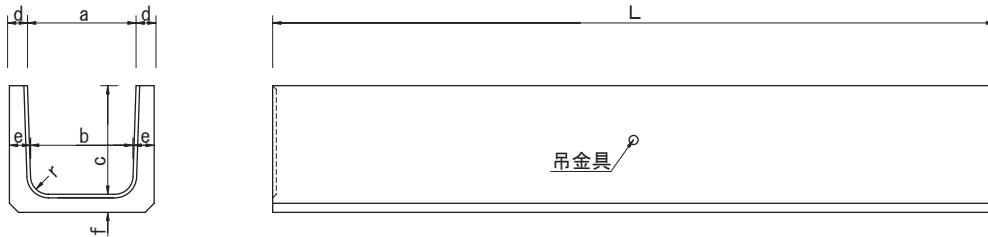

種類	呼び名	参考質量 (kg)		寸法 (mm)								
		495	1,995	a	b	c	d	e	f	r	l	
1種	250	49	200	250	230	250	45	55	50	50	495	1,995
	300 A	62	251	300	280	300	50	60	50	50	495	1,995
	300 B	79	321	300	270	400	50	65	55	50	495	1,995
	300 C	98	396	300	260	500	50	70	60	50	495	1,995
	400 A	86	347	400	370	400	50	65	55	50	495	1,995
	400 B	105	425	400	360	500	50	70	60	50	495	1,995
	500 A	112	453	500	460	500	50	70	60	50	495	1,995
	500 B	133	537	500	450	600	50	75	65	50	495	1,995
3種	250	56	227	250	230	250	55	65	55	50	495	1,995
	300 A	74	301	300	280	300	60	70	60	50	495	1,995
	300 B	88	356	300	270	400	55	70	65	50	495	1,995
	300 C	115	463	300	260	500	60	80	75	50	495	1,995
	400 A	99	399	400	370	400	55	70	70	50	495	1,995
	400 B	126	508	400	360	500	60	80	75	50	495	1,995
	500 A	138	558	500	460	500	60	80	80	50	495	1,995
	500 B	173	699	500	450	600	65	90	90	50	495	1,995

## □改良型道路側溝

呼び名	参考質量 (kg)	寸法 (mm)								
		a	b	c	d	e	f	r	l	
250	235	250	230	250	55	65	65	50	2,000 又は 500	
300 A	310	300	280	300	60	70	70	50		
400 A	400	400	370	400	55	70	70	50		
500 A	560	500	460	500	60	80	80	50		